




# NSN:5965-66-151-5433

## BLACK NOISE ENVIRONMENT COMMUNICATIONS HEADSET F/A-18 FLIGHT LINE USE

Tested by the National Acoustic Laboratories to AS/NZS 1270:2002

SLC80 RATING <b>30</b>	CLASS <b>5</b>		MASS <b>455g</b>		CLAMP FORCE <b>10.0N</b>		
TEST FREQUENCY (Hz)	125	250	500	1000	2000	4000	8000
MEAN ATTENUATION	15.5	19.7	29.7	34.7	35.1	39.6	39.3
STANDARD DEVIATION	3.5	2.7	4.0	3.2	3.5	4.5	6.0
MEAN MINUS SD	12.0	17.0	25.7	31.5	31.6	35.1	33.3

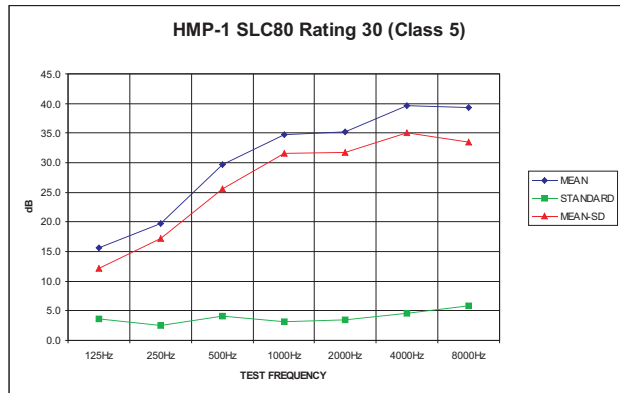

### Description:

Style: Over the Head, Headband & leather cover  
 Headband: Stainless Steel  
 Cups: ABS  
 Colour: Military Green

### Cabling:

Main: Four independently wire lap screened conductors, PUR sheath, 900mm, part coiled  
 Intercup: Twisted pair, PUR sheath  
 Microphone: Twisted pair, 2 Kevlar strain cords, PUR sheath

### Termination:

Nexus 4 pin (U-93A/U) TP-102 plug

### Microphone:

Boom: Mil Mk-1564 stainless steel black nickel finish  
 Element: M87/AIC Noise cancelling dynamic  
 Sensitivity: 50.4 to 112uV @ 1kHz/SPL 103 db  
 Impedance: 5 ohm @ 1kHz +/- 1 ohm  
 Response: 200 to 6,000Hz  
 N/cancelling: 15 db

### Earphones:

Type: Dynamic H-143/AIC per MIL-E-25670  
 Impedance: 19 ohm @ 1kHz x 2 wired in parallel  
 Response: 100 to 5,500Hz

### Weight:

455 grams (includes standard cable & plug)

### Warranty:

1 year

### SLC80 Rating:

**30 (Class 5)**

### Manufacturers

### Code:

Z8X88



Manufactured in Australia by Mobile One Australia Pty. Ltd.  
 Camden Airport Camden NSW 2570. PO Box 123 Camden NSW 2570. Ph 02 4655 6677  
[www.mobileone.com.au](http://www.mobileone.com.au)