




HSP-2(GA)

GENERAL AVIATION HEADSET

Tested by the National Acoustic Laboratories to AS/NZS 1270:2002

SLC80 RATING 28	CLASS 5		MASS 408g		CLAMP FORCE 10.1N		
TEST FREQUENCY (Hz)	125	250	500	1000	2000	4000	8000
MEAN ATTENUATION	14.6	19.3	29.5	33.0	35.5	38.3	42.2
STANDARD DEVIATION	4.8	3.9	5.3	5.8	3.4	3.2	6.0
MEAN MINUS SD	9.8	15.4	24.2	27.2	32.1	35.1	36.2

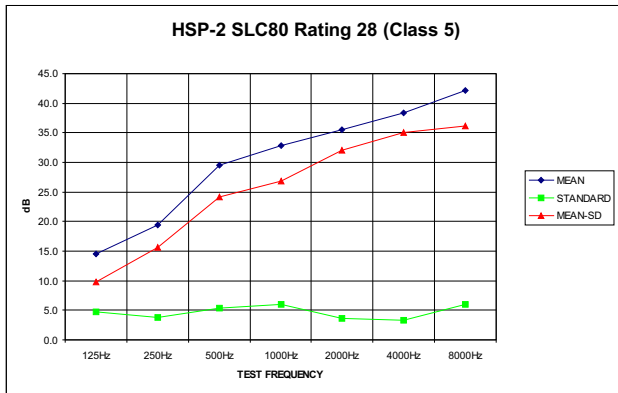

Description:

Style: Headband, with leather cover
 Band: Stainless Steel
 Cups: ABS
 Colour: Military Green

Cabling:

Main: Straight cable with "Y" Split
 Length: 1.44 Metres
 Intercup: Twisted pair, PUR sheath

Termination:

PJ-068 & PJ-055 Plugs

Volume Control:

Located on L.H.S. earcup

Microphone:

Boom: MB-102, Infinitely adjustable, field replaceable
 Element: Noise cancelling electret condenser
 Sensitivity: -71 db +/- 3.5db @ 1kHz (0dB=1v/μbar)
 Impedance: 1.6k ohms +/- 30% @ 1kHz (RI = 2k ohm)
 Response: 300 to 4,000Hz

Earphones:

Type: Dynamic
 Impedance: 300 ohm x 2 wired in parallel
 Response: 300 to 3,500Hz @1kHz +/-45 ohms

Weight:

408 grams

Warranty:

3 year

SLC80 Rating:

28 (Class 5)

