




# HSP-2(xxxx)

## HIGH NOISE ENVIRONMENT COMMUNICATIONS HEADSET FOR DIRECT CONNECTION TO A RADIO

Tested by the National Acoustic Laboratories to AS/NZS 1270:2002

SLC80 RATING <b>28</b>	CLASS <b>5</b>		MASS <b>408g</b>		CLAMP FORCE <b>10.1N</b>		
TEST FREQUENCY (Hz)	125	250	500	1000	2000	4000	8000
MEAN ATTENUATION	14.6	19.3	29.5	33.0	35.5	38.3	42.2
STANDARD DEVIATION	4.8	3.9	5.3	5.8	3.4	3.2	6.0
MEAN MINUS SD	9.8	15.4	24.2	27.2	32.1	35.1	36.2

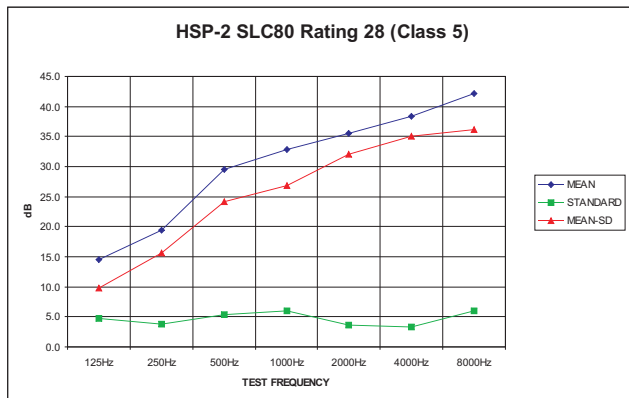

### Description:

Style: Headband with leather cover  
 Band: Stainless Steel  
 Cups: ABS  
 Colour: Military Green

### Cabling:

Main: Custom manufactured to suit each radio make and model  
 Length: Various  
 Intercup: Twisted pair, PUR sheath

### Termination:

To suit nominated radio accessory port

### Push to talk:

IP67 sealed (red) push button

### Microphone:

Boom: MB-102, Infinitely adjustable, field replaceable  
 Element: Noise cancelling electret condenser  
 Sensitivity: -71 db +/- 3.5db @ 1kHz (0dB=1v/ $\mu$ bar)  
 Impedance: 1.6k ohms +/- 30% @ 1kHz (RI = 2k ohm)  
 Response: 300 to 4,000Hz

### Earphones:

Type: Dynamic  
 Impedance: 300 ohm x 2 wired in parallel  
 Response: 300 to 3,500Hz @1kHz +/-45 ohms

### Weight:

408 grams

### Warranty:

1 year

SLC80 Rating: **28 (Class 5)**



Example Shown:  
 HSP-2 (M300) to suit Motorola GP300 portable

Manufactured in Australia by Mobile One Australia Pty. Ltd.  
 Camden Airport Camden NSW 2570. PO Box 123 Camden NSW 2570. Ph 02 4655 6677  
[www.mobileone.com.au](http://www.mobileone.com.au)