




# HSP-5

## HIGH NOISE ENVIRONMENT HARD HAT MOUNTING HEADSET FOR CONNECTION TO A RADIO VIA A INTERFACE CABLE

Tested by the National Acoustic Laboratories to AS/NZS 1270:2002

SLC <sub>80</sub> RATING	28		CLASS 5		MASS 400g		CLAMP FORCE 11.0N	
TEST FREQUENCY (Hz)	125	250	500	1000	2000	4000	8000	
MEAN ATTENUATION	15.7	19.5	27.6	30.6	35.0	38.3	46.3	
STANDARD DEVIATION	4.7	3.2	3.7	3.9	3.7	3.6	4.7	
MEAN MINUS SD	11.0	16.3	23.9	26.7	31.3	34.7	41.6	

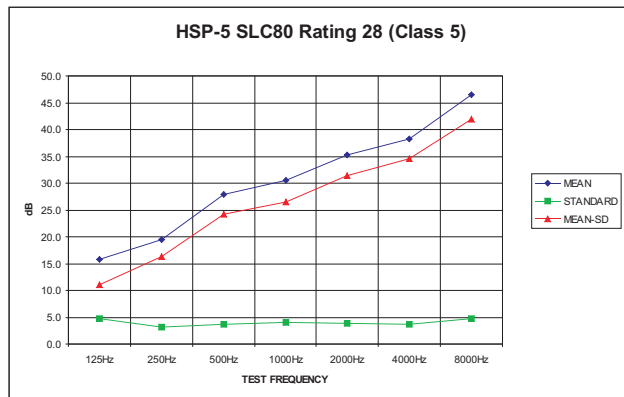

### Description:

Style: Hardhat mounting  
 Mounting Arms: Stainless Steel & Resin Plastic  
 Cups: ABS  
 Colour: Military Green

### Cabling:

Main: Four independently wire lap screened conductors, PUR sheath  
 Length: 900mm, part coiled  
 Intercup: Twisted pair, PUR sheath

### Termination:

Nexus 4 pin TP-120B plug

### Microphone:

Boom: MB-102, Infinitely adjustable, field replaceable  
 Element: Noise cancelling electret condenser  
 Sensitivity: -71 db +/- 3.5db @ 1kHz (0dB=1v/μbar)  
 Impedance: 1.6k ohms +/- 30% @ 1kHz (RI = 2k ohm)  
 Response: 300 to 4,000Hz

### Earphones:

Type: Dynamic  
 Impedance: 300 ohm x 2 wired in parallel  
 Response: 300 to 3,500Hz @1kHz +/-45 ohms

### Weight:

423 grams (includes standard cable & plug)

### Warranty:

1 year

### SLC80 Rating:

28 (Class 5)



Manufactured in Australia by Mobile One Australia Pty. Ltd.  
 Camden Airport Camden NSW 2570. PO Box 123 Camden NSW 2570. Ph 02 4655 6677  
[www.mobileone.com.au](http://www.mobileone.com.au)